

1.0Amp Schottky Barrier Rectifiers

1N17~1N19

Features

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Guardring for overvoltage protection
- ◆ Low power loss, high efficiency
- ◆ High current capability, low forward voltage drop
- ◆ High surge capability
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data


Case: R-1 molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.007 ounce, 0.20 grams

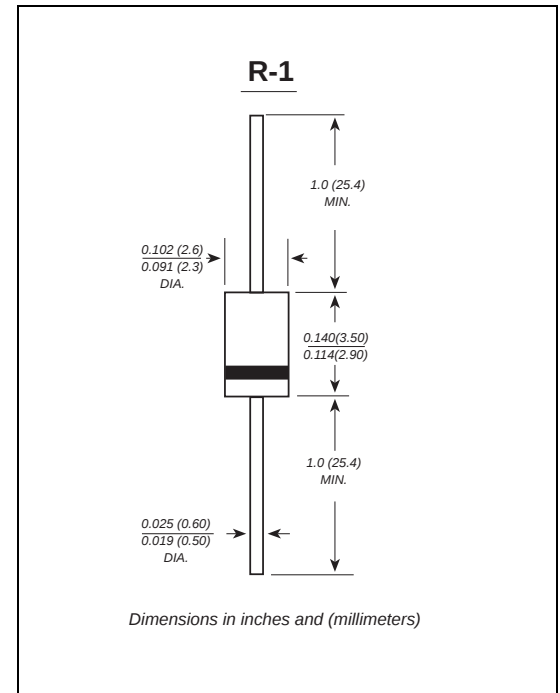

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	1N17	1N18	1N19	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	VOLTS
Maximum RMS voltage	V_{RMS}	14	21	28	VOLTS
Maximum DC blocking voltage	V_{DC}	20	30	40	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_L=90^\circ\text{C}$	$I_{(AV)}$	1.0			Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	25.0			Amps
Maximum instantaneous forward voltage at 1.0A	V_F	0.450	0.550	0.600	Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	0.5 10.0			mA
Typical junction capacitance (NOTE 1)	C_J	110.0			pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	50.0			$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +125			$^\circ\text{C}$

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

Ratings And Characteristic Curves

1N17 THRU 1N19

FIG. 1- FORWARD CURRENT DERATING CURVE

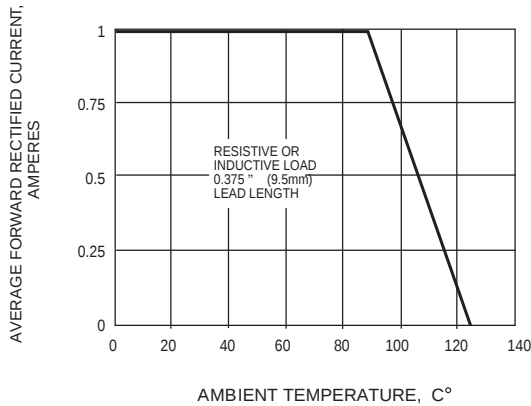


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

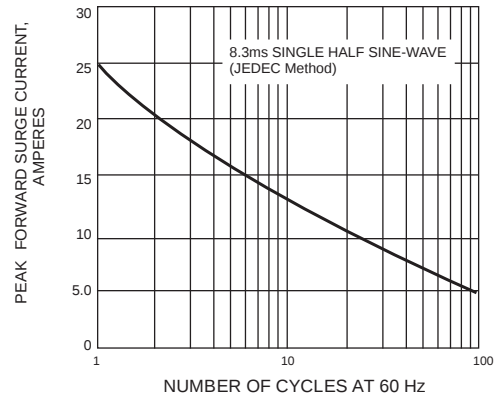


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

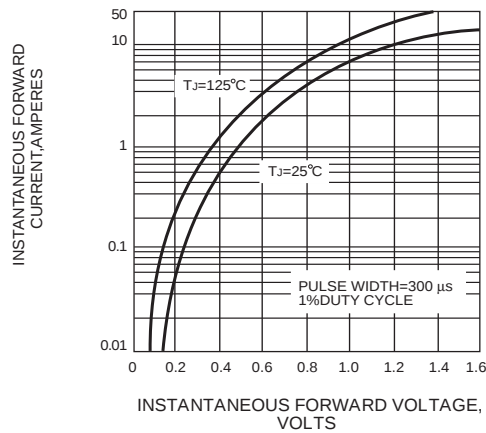


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

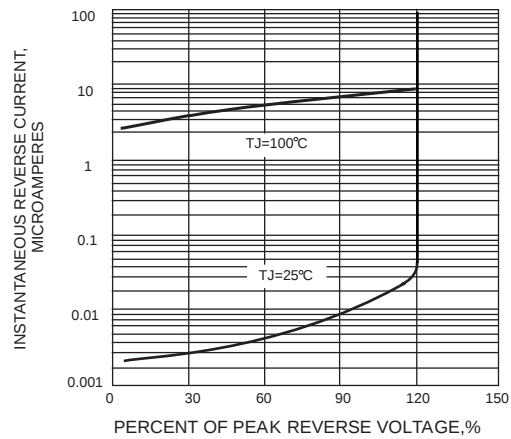


FIG. 5-TYPICAL JUNCTION CAPACITANCE

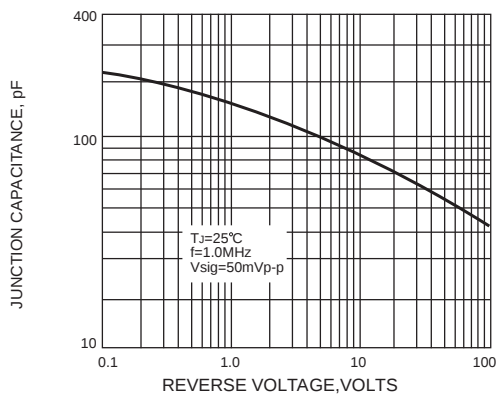


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

